



PROFESSIONAL
THINKING

PRODUCT SHEET EKF 1664 TC

TECNOEKA SRL - VIA MARCO POLO, 11 - 35010 BORGORICCO - PADOVA - ITALY - TEL. +39 049 5791479 +39 049 9300344 - FAX +39 049 5794387 - E-MAIL: INFO@TECNOEKA.COM - WWW.TECNOEKA.COM - WWW.TECNOEKA.RU

EKF 1664 TC – COMBI OVEN WITH TOUCH CONTROL 16 TRAYS/GRIDS (600x400 mm)

EKA TOUCH LINE


BAKING



It is the most powerful oven for pastry businesses and bakeries in the new Touch Line range: 16 pans measuring 600x400 mm can be slotted into a practical removable trolley featuring an ergonomically designed grip and lockable castors.

It has a circuit board allowing you to store 240 recipes, each with 9 cooking steps. The Touch Control panel has an extremely intuitive interface to make preparing even particularly elaborate desserts quick and easy.

High-quality materials and 5 fans arranged along the full height of the oven wall combine to ensure even cooking.

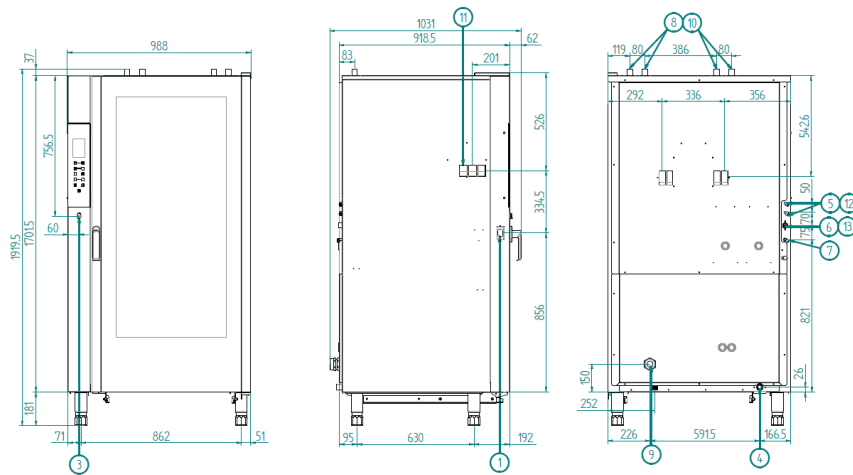

LEGEND

1	USB PORT	11	DON'T CLOG UP VENTILATION OPENINGS
2	SERIAL PORT	12	WATER INLET MAX. 200 kPa
3	PLUG FOR CORE PROBE	13	SOFTENED WATER INLET MAX. 200 kPa
4	WATER OUTLET TUBE	14	BOILER CLEANING INLET
5	WASHING WATER INLET	15	DON'T OPEN CAP WHILE WORKING
6	SOFTENED WATER INLET	16	GAS INLET THREADED JOINT 3/4"
7	WATER INLET	17	POWER SUPPLY TO TOP OVEN
8	STEAM OUTLET	18	PRE-CARVED HOLE FOR BOTTOM OVEN POWER SUPPLY
9	ELECTRIC CABLE FIXER	19	STEAM SUCTION PIPE
10	CAUTION! HOT SURFACE		





**PROFESSIONAL
THINKING**

PRODUCT SHEET EKF 1664 TC

TECNOEKA SRL - VIA MARCO POLO, 11 - 35010 BORGORICCO - PADOVA - ITALY - TEL. +39 049 5791479 +39 049 9300344 - FAX +39 049 5794387 - E-MAIL: INFO@TECNOEKA.COM - WWW.TECNOEKA.COM - WWW.TECNOEKA.RU

DIMENSIONAL FEATURES				FUNCTIONAL FEATURES	
DIMENSIONS	W	D	H	POWER	ELECTRICITY
OVEN DIMENSIONS (mm)	985	1030	1920	CAPACITY	N° 16 TRAYS/GRIDS (600x400 mm)
CARDBOARD BOX DIMENSIONS WITH PALLET (WxDxH mm)	1200	1200	2070	TYPE OF COOKING	VENTILATED
OVEN DIMENSIONS (inches)	38,77	40,55	75,59	STEAM (see legend)	DIRECT STEAM CONTROLLED BY TOUCH SCREEN (10 LEVELS)
CARDBOARD BOX DIMENSIONS WITH PALLET (inches)	47,24	47,24	81,49	COOKING CHAMBER	AISI 304 STAINLESS STEEL
OVEN WEIGHT (kg)	230			WATER OUTLET	Ø 30 mm TUBE
PACKED OVEN WEIGHT (kg)	/			STEAM OUTLET	DIRECT
OVEN WEIGHT (lbs)	507,06			TEMPERATURE	30 + 260°C
PACKED OVEN WEIGHT (lbs)	/			TEMPERATURE CONTROL	DIGITAL PROBE THERMOMETER
DISTANCE BETWEEN RACK RAILS (mm)	80			CONTROL PANEL	TOUCH CONTROL – LEFT SIDE
FAN DIMENSION (mm)	Ø 197 - NR. 36 BLADES			N° OF PROGRAMS	240
CENTER-TO-CENTER DISTANCE BETWEEN FEET (mm)	862			PROGRAMMABLE COOKING STEPS	9
				PRE-HEATING TEMPERATURE	180°C
ELECTRICAL FEATURES				PRE-HEATING FUNCTION	PROGRAMMABLE
POWER SUPPLY (kW)	30			DOOR	RIGHT SIDE OPENING
FREQUENCY (Hz)	50/60				VENTILATED
VOLTAGE (Volt)	AC 380/400 3N				INSPECTIONABLE GLASS
N° OF MOTORS	5 BIDIRECTIONAL				ADJUSTABLE
RPM	2800			EQUIPMENT	
N° OF RESISTORS	CIRC.	5 pcs	5,7 kW	BRAKING WHEELED TROLLEY WITH HANDLE	
	TOP+GRILL	/	/	MANUAL + AUTOMATIC WASHING SET UP *	
	SOLE	/	/	PLUG FOR CORE PROBE	
BOILER	/			USB PORT	
LIMIT CONTROL	UNIPOLAR WITH MANUAL RESET			OPTIONAL	
PROTECTION AGAINST WATER	IPX 5			ALUMINIUM TRAY (600x400x20 mm)	COD. KT9P/A
LIGHTING	NR.1 LED BAR (IN THE DOOR)			PERFORATED ALUMINIUM TRAY (600x400x20 mm)	COD. KTF8P/A
PLUS				5 LANES PERFORATED ALUMINIUM TRAY (600x400x20 mm)	COD. KTF9P
USB PORT TO UPLOAD AND DOWNLOAD RECIPES AND HACCP DATA	SCREEN-PRINTED GLASS CONTROL PANEL			CHROMED GRID (600x400 mm)	COD. KG9P
240 STORABLE RECIPES (40 EKA RECIPES, 200 USER-SETTABLE RECIPES)	ADJUSTABLE DOOR HINGES			5 LANES AISI 304 CHROMED GRID (600x400 mm)	COD. KG5CPX
DELAYED START FUNCTION UP TO 23 HOURS AND 59 MINUTES	STAINLESS STEEL COOKING CHAMBER			PROOFER	COD. EKL 1264 TC – COD. EKL 1264 TCR
10 LANGUAGES FOR THE CONTROL PANEL (IT-FR-ENG-DE -ES-ROMANIAN-POLISH-BULGARIAN-UKRAINIAN-RUSSIAN)	EMBEDDED GASKET			CONDENSATION HOOD	COD. EKCC 20TC
CHAMBER DRAIN FOR LIQUIDS	FORCED COOLING SYSTEM OF INNER PARTS			CORE PROBE	COD. EKSC
DIRECT CHIMNEY FOR COOKING FUMES/STEAM	IPX 5			CORE PROBE WITH SUPPORT	COD. EKSCS
DOUBLE CONNECTION WATER ENTRY (NORMAL AND SOFTENED)	MANUAL+AUTOMATIC WASHING SET UP			SELF-CLEANING AUTOMATIC SYSTEM	COD. KWT
"ALL GLASS" DOOR WITH "SATIN-FINISH" (AISI 304) STAINLESS STEEL SIDE PROFILES	CB CERTIFICATION			SPRAY KIT WITH SUPPORT	COD. EKKD
QUICK COOLING OF COOKING CHAMBER				SPARKLING AID	COD. KBRIL AND COD. KBRILMD
				CLEANING FLUID	COD. KDET

LEGEND

*For automatic washing set up are required nr. 2 kit Cod. KWT

STEAM



A pipe sprays the water directly on moving fans. It's ideal for roast meat, fish and steamed vegetables.

